


KS42

Universal AC motor



The KS42 universal motor is available with different bearing brackets and various fan designs for optimal airflow. We adapt the motor interface to the customer application.

The motor is powerful and has been designed to meet the needs of producers of high-end kitchen appliances such as stand mixers, blenders and mincers. In addition, the motor is put to use in industrial equipment such as grinders and structural applications.

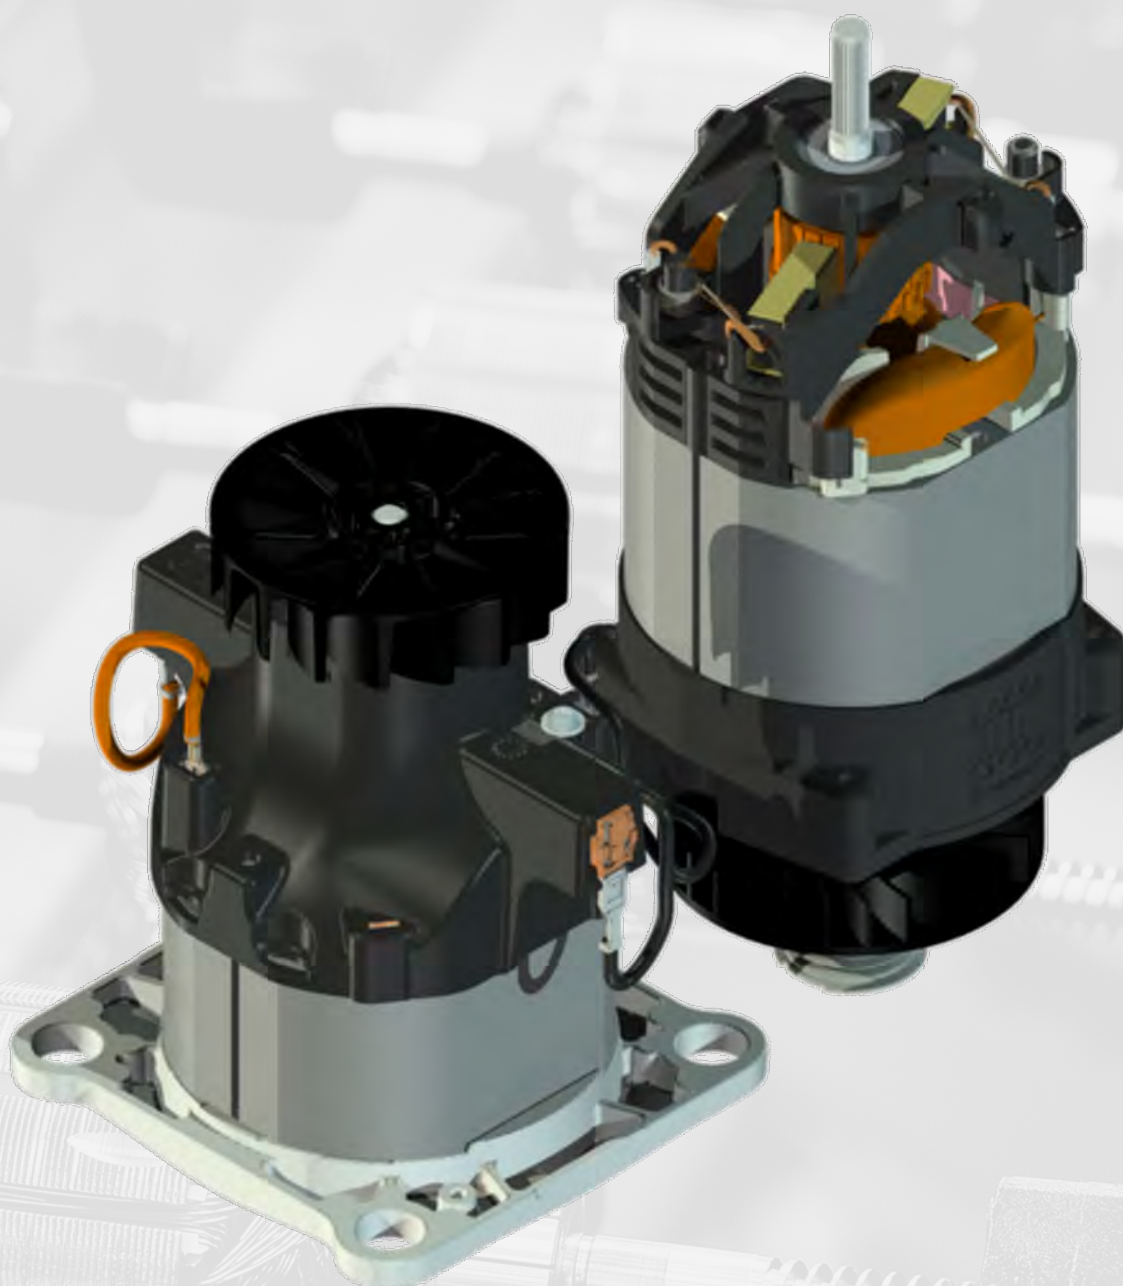

SWEDEN.MADE.

Specification

Armature diameter: 42 mm

Armature length: 25-50 mm

Shaft diameter: 8-10 mm



Nominal voltage: 120 / 240 V
AC

Speed range: 0-30 000 rpm


Insulation class: F

Power: 300-2 200 W


Torque: 0-5 Nm

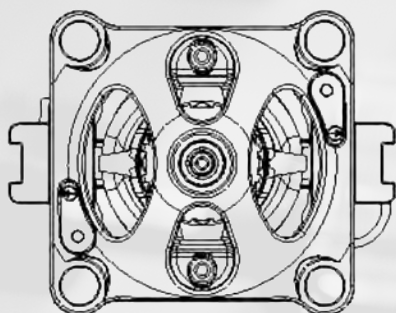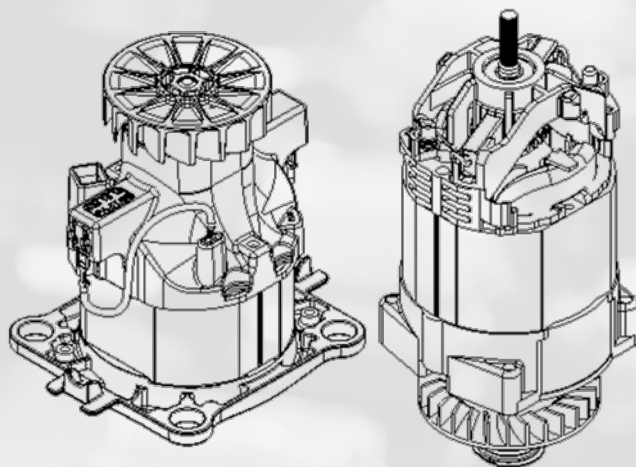

Application specific
mounting plate with
rubber grommets for
vibration damping

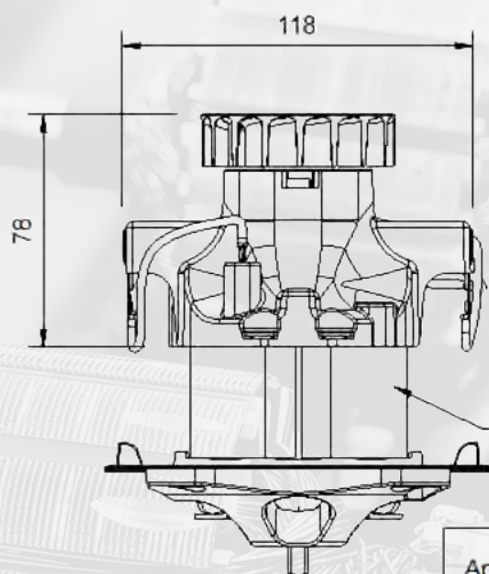

Stack height: 25-50mm

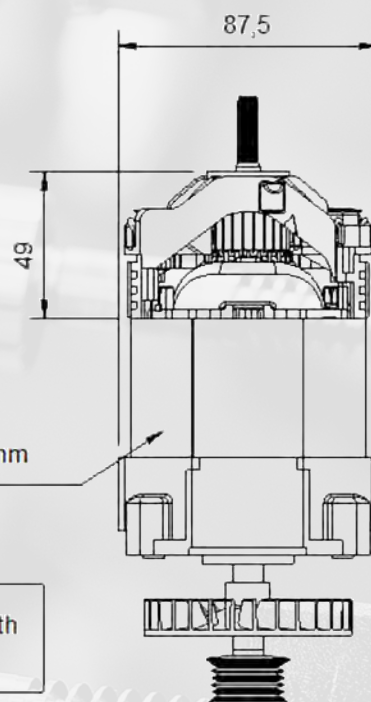

Application specific shaft with
optional fan and pulley

SWEDEN.MADE.