


KSV4030



Permanent Magnet DC Motor

The KSV4030 motor is available with worm wheel transmission. The outgoing shaft can be customised and the motor can be equipped with a fully integrated optical encoder (single or dual) or Tacho.

The motor can be used for various applications such as wire feeders for three-phase arc welding power sources, garage doors, electrical lifting devices, agricultural equipment and within the automotive industry. The gear box housing is optionally available in plastic for weight and cost optimization.

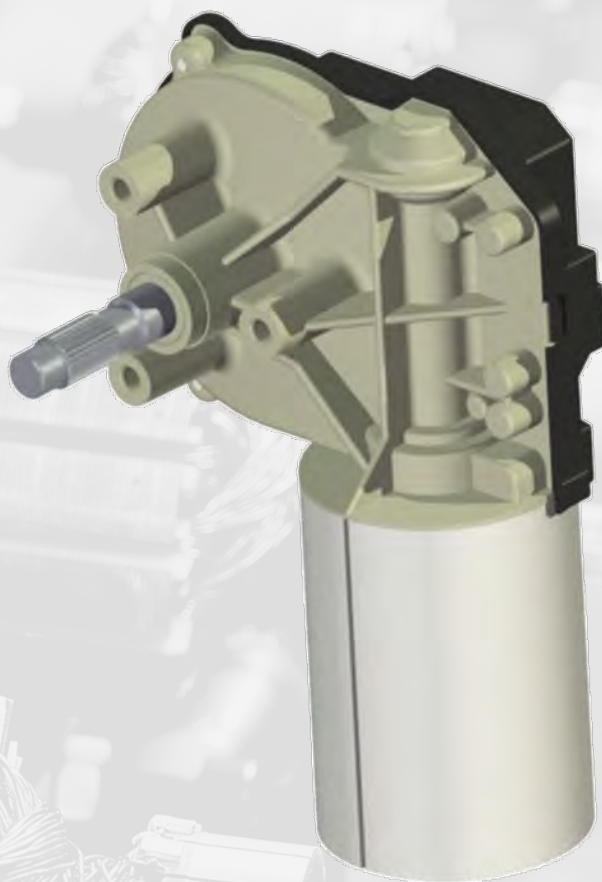

SWEDEN.MADE.

Specification KSV4030

Armature diameter: 40 mm

Armature length: 30 mm

Nominal voltage: 12 - 42 V

Optional gear ratio: 37,5:1 / 75:1 / 125:1

No load speed range: 20 - 255 rpm


Degree of protection: IP20

Insulation class: F

Motor weight: 0,9 kg

Optional encoder: 60 D&S cpr

Optional tachometer: Yes

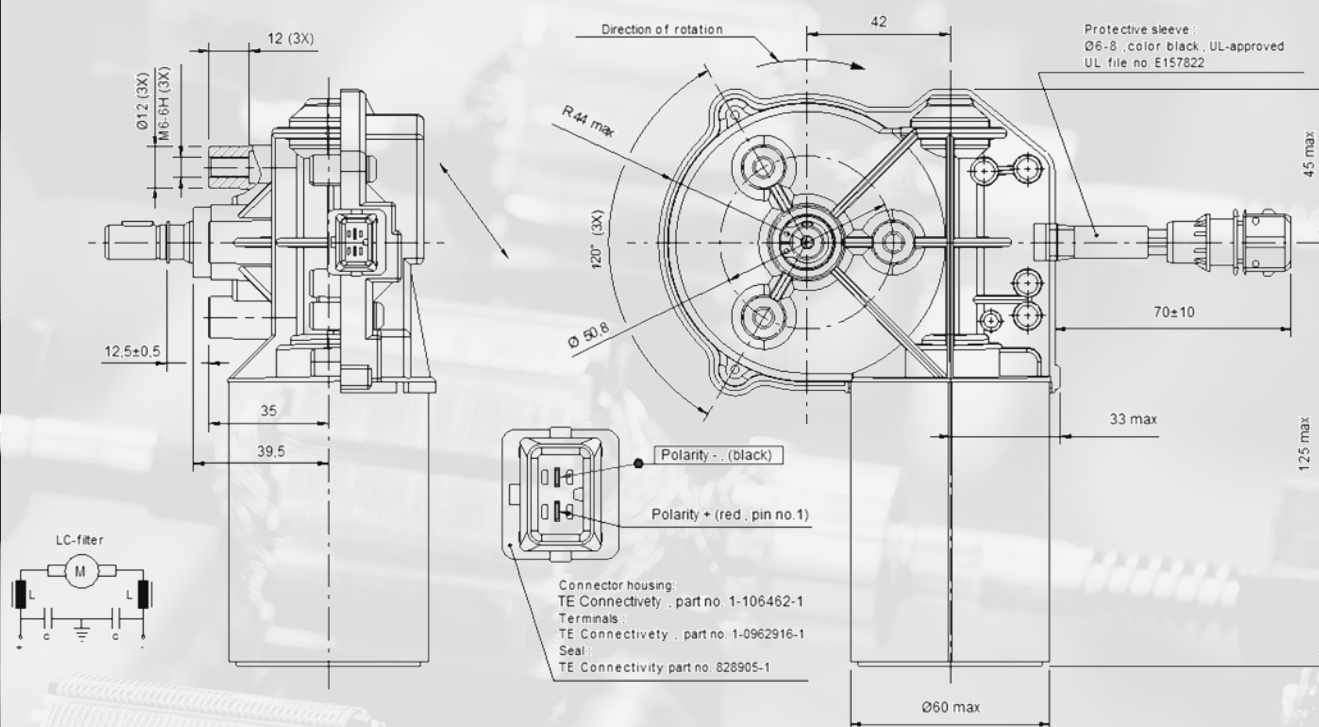

SWEDEN.MADE.